


MODEL 882 ADV-X

STRUTTED INTERIOR HIGH SPEED FABRIC DOOR

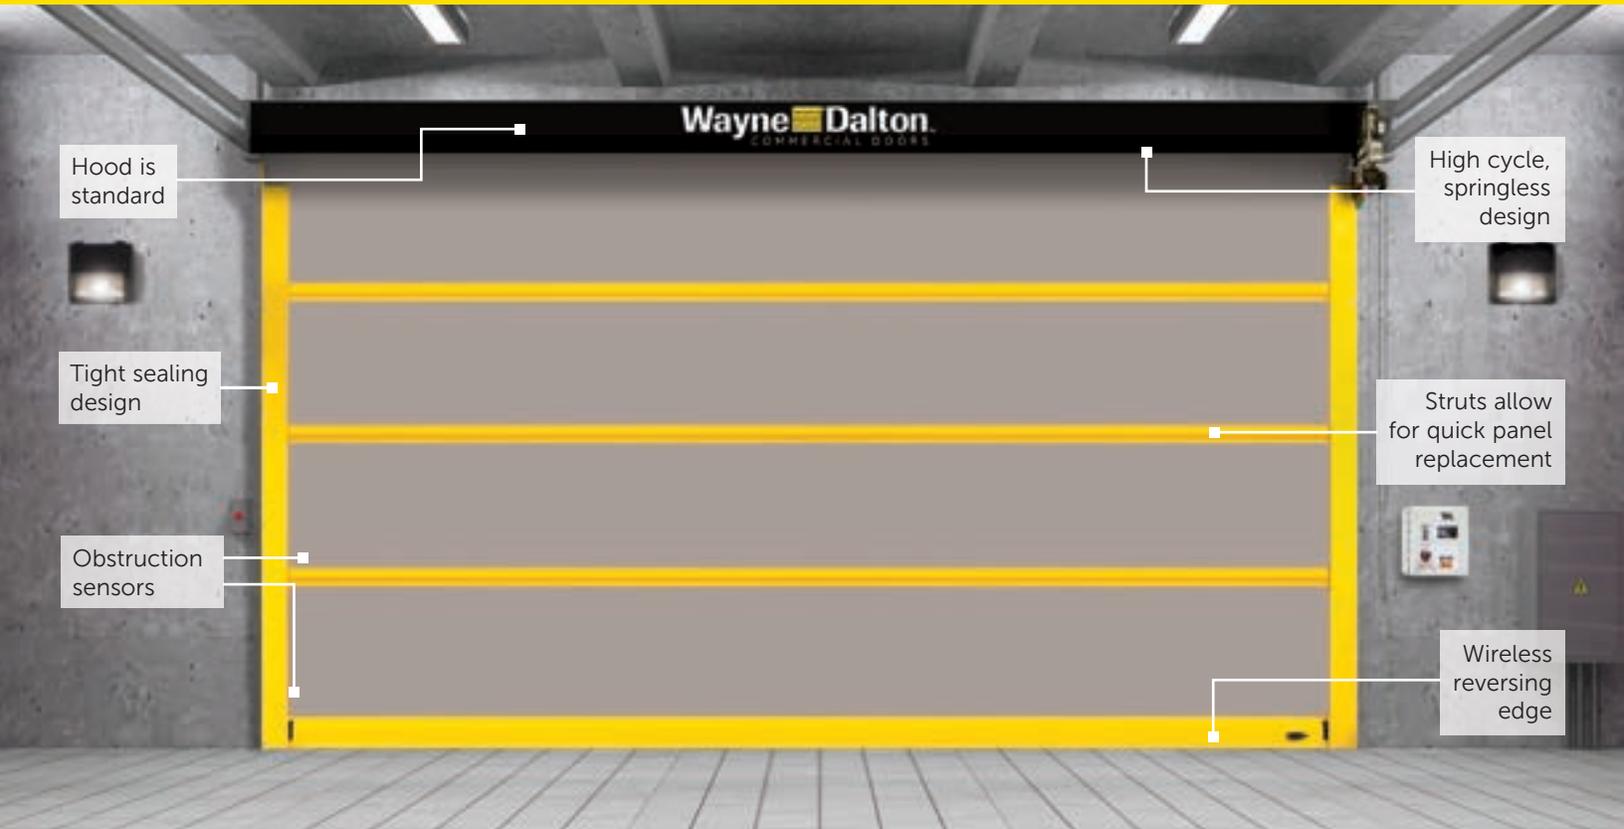

Lightweight and Durable

Ideal for manufacturing, warehouse and distribution facilities, the Model 882 ADV-X is built to last.

High Cycle Design

- Springless design requires minimal interruption for maintenance
- Direct-mounted gear drive minimizes wear and tear
- Variable frequency drive eliminates sudden jolts from door start/stop

Applications

- Manufacturing/Heavy Manufacturing
- Warehouse/Distribution
- Food and Beverage
- Cold Storage

Low Maintenance

- Breakaway design impact detection and push button self-repair; plug and play wiring

Strutted Design

- Allows for quick section replacement, while reducing curtain deflection under pressure

MODEL 882 ADV-X

STRUTTED INTERIOR HIGH SPEED FABRIC DOOR

TECHNICAL INFORMATION

ATTRIBUTES	GENERAL SPECIFICATIONS
Application	Interior
Maximum width	16'
Maximum height	15'
Opening speed	Up to 65"/sec
Closing speed	Up to 40"/sec
Break-away self reset	Yes
Pressure/wind resistance*	Up to 4.0 psf or 76 mph
Operational pressure**	Up to 2.5 psf or 53 mph
Wind strut	1" strut standard
Door panel	2 layers of PVC-coated polyester with 1 layer of polyester weave
Vision	20" high windows spaced evenly across width of door
Operation	Direct drive motor and gearbox system with a door stop device
Control	Variable frequency drive NEMA 4X cULus listed Onboard self diagnostic and service reminder Built-in padlockable field disconnect
Obstruction detection	Infrared sensors mounted in-plane to the door curtain at 18" and 50" - 54" from floor
Reversing safety edge	Wireless reversing edge
Electrical availability	120V AC 1PH, 230V AC 1PH, 230V AC 3PH, 460V AC 3PH, 575V AC 3PH
Electrical availability	120V AC 1PH, 230V AC 1PH, 230V AC 3PH, 460V AC 3PH, 575V AC 3PH

* Pressure/wind resistance value is the ultimate pressure tested at door width of 16'. The mph is determined in accordance to ASCE 7-10 EXP B.

**Operational pressure value is the pressure tested up to 100,000 cycles at door width of 16'.


DOOR OPTIONS

- 20" high windows spaced evenly across width of door
- Multiple actuation options – push button, motion detector, radio control, key switch, pull switch, loop detector, treadle switch
- Signaling devices – red/green LED warning light, horn/strobe combination, rotating warning light

COLOR OPTION




Red



Blue



Gray



Black



5-Year Limited Warranty

Standard color for guides, brackets, struts and bottom bar is yellow. Approximately 200 optional RAL powder coat colors are also available.